

EUP10A-1HMC-1-350 (Product No.:103100410201)

Summary

EUP10A-1HMC-1-350 is a constant current output mode LED driver. The output current can be easily set via DIP switch, and the driver can be adjusted by the external 0/1-10VDC active signal, PWM signal, or adjustable resistance to achieve the smooth dimming effect.

Product Features

- Single channel output, output current level selectable by DIP S.W.
- Support 3-in-1 dimming mode(0/1-10V active signal, adjustable resistance, PWM)
- High input voltage of 220VAC ~ 240VAC
- High efficiency up to 80%
- Built-in active PFC function
- 100% output when no dimming signal input, can be used as normal power supply
- Dimming effect smooth, no flicker
- Protections: Short circuit, over load, over temperature
- Suitable for indoor LED lighting application, such as down light, spot light, and so on




Application




Technical Parameters

Model	EUP10A-1HMC-1-350																																				
Input	Efficiency	80%@230VAC,Full load																																			
	Voltage	220VAC-240VAC																																			
	Frequency Range(Hz)	50/60Hz																																			
	Power Factor	>0.5@230VAC,Full load																																			
	AC Current(max)	0.12Amax@230VAC																																			
	Inrush Current(max)	Cold start,18A(twidth=14us measured at 50% Ipeak)@230VAC																																			
Output	Current(mA)/Voltage (VDC) Power(W)	350mA/2-21VDC/7.35W 550mA/2-18VDC/9.9W	400mA/2-21VDC/8.4W 600mA/2-16VDC/9.6W	450mA/2-21VDC/9.45W 650mA/2-15VDC/9.75W	500mA/2-20VDC/10W 700mA/2-14VDC/9.8W																																
	Ripple Current	<3%																																			
	Channel	1																																			
	Current Tolerance	±5%																																			
	No load output voltage	25VDC Max																																			
		Current Selection Table <table border="1"> <tr> <td>ON</td> <td>OFF</td> <td>1</td> <td>2</td> <td>3</td> <td>1</td> <td>2</td> <td>3</td> <td>1</td> <td>2</td> <td>3</td> </tr> <tr> <td></td> <td></td> <td>350mA</td> <td>400mA</td> <td>450mA</td> <td>500mA</td> <td>550mA</td> <td>600mA</td> <td>650mA</td> <td>700mA</td> <td></td> </tr> <tr> <td></td> <td></td> <td>2-21V</td> <td>2-21V</td> <td>2-21V</td> <td>2-20V</td> <td>2-18V</td> <td>2-16V</td> <td>2-15V</td> <td>2-14V</td> <td></td> </tr> </table>			ON	OFF	1	2	3	1	2	3	1	2	3			350mA	400mA	450mA	500mA	550mA	600mA	650mA	700mA				2-21V	2-21V	2-21V	2-20V	2-18V	2-16V	2-15V	2-14V	
ON	OFF	1	2	3	1	2	3	1	2	3																											
		350mA	400mA	450mA	500mA	550mA	600mA	650mA	700mA																												
		2-21V	2-21V	2-21V	2-20V	2-18V	2-16V	2-15V	2-14V																												
		Remark: Function default setting is: 350mA (@switch are all OFF state)																																			
Function	Dimming Type	0/1-10V active signal, adjustable resistance, PWM																																			
Protection	Short Circuit	after fault removed Close output ,the output current recovers automatically																																			
	Over Load	When the output voltage is exceeded, the output current decreases and, recovers automatically when the load is reduced.																																			
	Over Temperature	Shut down the output, recovers automatically when temp. back to normal.																																			
Others	Working Temp.	-20°C~50°C																																			
	Storage Temp., Humidity	-40°C~85°C, 20-90%RH																																			
	tc	90°C																																			
	Material	PC																																			
	IP Rating	IP20																																			
	Lifetime	30,000h@tc:80°C																																			
	Warranty Condition	3 years																																			
	Switch Cycle	>15,000 times																																			
	Packing(weight)	Net weight: 90g±5%/PCS; 100PCS/Cartron; 7kg±5%/Cartron; Cartron Size: 515*235*140mm(L*W*H)																																			
	Dimension	110*30*22mm (L*W*H)																																			


Dimension(mm)

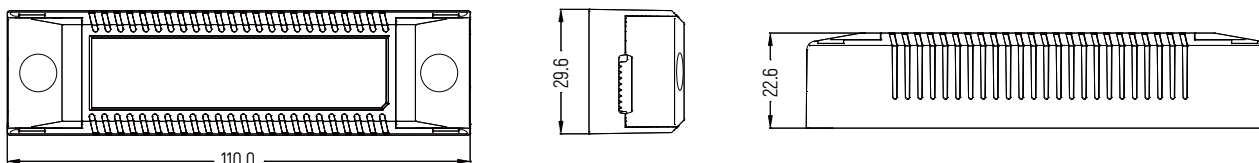


0/1-10V Wiring

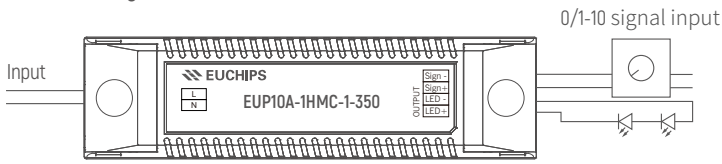

Dimming Curve

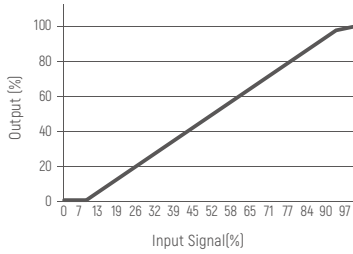

Derating Curve



Cautions

- 1.This product should be installed by qualified personnel.
- 2.This product is non waterproof, need to avoid sun and rain.In case of outdoor use, please ensure it is mounted in a water proof enclosure.
- 3.Good heat dissipation conditions extend product life. Please install the product in a well-ventilated environment.
- 4.Please make sure LED power supply output voltage, current is used to meet the product requirements.
- 5.Please ensure that adequate sized cable is used from the controller to the LED lights to carry the current. Please also ensure that the cable is secured tightly in the connector.
- 6.Due to safety concerns, PVC or rubber cord of 0.75- 2.5mm² is recommended for input and output terminal(s)[excluding signal terminals]. Flat power cord is not suitable.Ensure all wire connections and polarities are correct before applying power to avoid any damages to the LED lights.
- 7.In case of malfunction, do not repair it yourself.

※ The contents of this manual are updated without prior notice. If the function of the product you are using is inconsistent with the instructions, the function of the product shall prevail.Please contact us if you have any questions .