



***LED STRIPLIGHT
& ACCESSORIES***



SMD3528 4.8W/M.

300.-

DIA 10 mm. H 4 mm.

60led/m.
24V 4.8w/m. 400Lumen/m.

IP 65

3000K, 4000K
Dimmable (0-10V/ Triac) Optional

SMD3528 9.6W/M.

450.-

DIA 10 mm. H 4 mm.

120led/m.
24V 9.6w/m. 800Lumen/m.

IP 65

2700K, 3000K, 4000K
Dimmable (0-10V/ Triac) Optional



SMD3528 14.4W/M.

500.-

DIA 10 mm. H 4 mm.

168led/m. Cutting length 100mm.
24V 9.6w/m. 1200Lumen/m.

IP 65

2700K, 3000K, 4000K, 6000K
Dimmable (0-10V/ Triac) Optional

LED STRIPLIGHT

**SMD3528 19.2W/M.****600.-**

DIA 10 mm. H 2 mm.

168led/m.
24V 19.2w/m. 1600Lumen/m.**IP 20**3000K, 4000K
Dimmable (0-10V/ Triac) Optional**SMD3528 28.8W/M.****800.-**

DIA 10 mm. H 2 mm.

120led/m.
24V 28w/m. 2400Lumen/m.**IP 20**3000K, 4000K, 6000K
Dimmable (0-10V/ Triac) Optional



SMD5050 7.2W/M.

350.-

DIA 12 mm. H 4 mm.

30led/m.
12V 7.2w/m. 600Lumen/m.

IP 65

2700K, 3000K, 4000K
Dimmable (0-10V/ Triac) Optional

SMD5050 14.4W/M.

200.-

DIA 10 mm. H 4 mm.

60led/m.
12V/24V 14.4w/m. 1200Lumen/m.

IP 20

3000K, 4000K, 6500K
Dimmable (0-10V/ Triac) Optional



SMD5050 14.4W/M.

500.-

DIA 12 mm. H 4 mm.

60led/m.
12V/24V 14.4w/m. 1200Lumen/m.

IP 65

2700K, 3000K, 4000K
Dimmable (0-10V/ Triac) Optional



LED STRIPLIGHT



SMD5050 RGB

600.-

DIA 12 mm. H 4 mm.

60led/m.
24V 14.4w/m.

IP 65

- RGB Color change
Use with RGB controller

SMD5050 RGBW

650.-

DIA 14 mm. H 4 mm.

60led/m.
24V 19.2w/m.

IP 65

- RGB+3000K
Use with RGBW controller



SMD5050 CCT

650.-

DIA 12 mm. H 4 mm.

60led/m.
24V 14.4w/m.

IP 65

- CCT 2700K-6500K
Use with CCT controller




LED STRIPLIGHT




COB 10W/M.

500.-

DIA 5 mm. H 2 mm.

 LED COB
24V 10w/m. 800Lumen/m.

IP 20

-  3000K, 4000K, 6000K
Dimmable (0-10V/ Triac) Optional

COB RGB 14W/M.

600.-

DIA 10 mm. H 2 mm.

 LED COB RGB
24V 14w/m.

IP 20

-  RGB Color change
Use with RGB controller



CCT


COB CCT 14W/M.

600.-

DIA 8 mm. H 2 mm.

 LED COB CCT
24V 14w/m.

IP 20

-  CCT 2700K-6500K
Use with CCT controller



LED STRIPLIGHT

NEONFLEX NS1617

1200.-

DIA 16 mm. H 17 mm.



168led/m.
24V 15w/m. 800Lumen/m.

IP 67




2700K, 3000K, 4000K, 6000K

Side Bending

Stainless steel clip/ Flexible stainless steel clip

IP68 optional

Dimmable (0-10V/ Triac) Optional

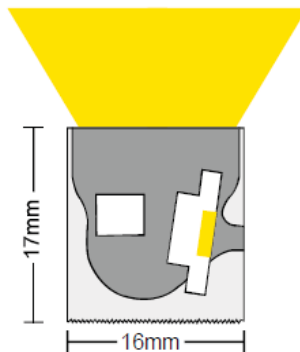

NEONFLEX NT1515

1200.-

DIA 15 mm. H 15 mm.



168led/m.
24V 15w/m. 800Lumen/m.

IP 67




2700K, 3000K, 4000K, 6000K

Top Bending

Stainless steel clip/ Flexible stainless steel clip

IP68 optional

Dimmable (0-10V/ Triac) Optional

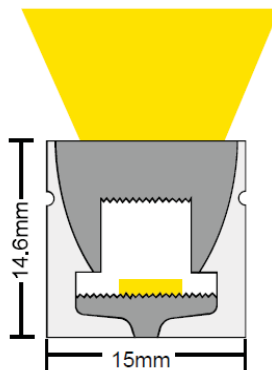

LED STRIPLIGHT

NEONFLEX NS1220

1200.-

DIA 12 mm. H 20 mm.



168led/m.
24V 15w/m. 800Lumen/m.

IP 67




2700K, 3000K, 4000K, 6000K

Side Bending

Aluminium clip/ Flexible stainless steel clip

IP68 optional

Dimmable (0-10V/ Triac) Optional

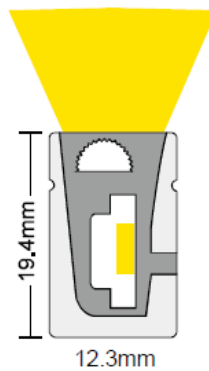

NEONFLEX NS0612

1000.-

DIA 6 mm. H 12 mm.



168led/m.
24V 10w/m.500Lumen/m.

IP 67




2700K, 3000K, 4000K, 6000K

Side Bending

Aluminium clip/ Flexible stainless steel clip

IP68 optional

Dimmable (0-10V/ Triac) Optional

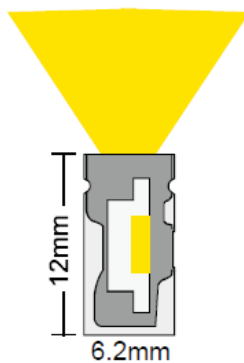

LED STRIPLIGHT

NEONFLEX NS1212

1000.-

DIA 12 mm. H 12 mm.



168led/m.



24V 10w/m. 500Lumen/m.

IP 67




2700K, 3000K, 4000K, 6000K

Side Bending

Stainless steel clip/ Flexible stainless steel clip

IP68 optional

Dimmable (0-10V/ Triac) Optional

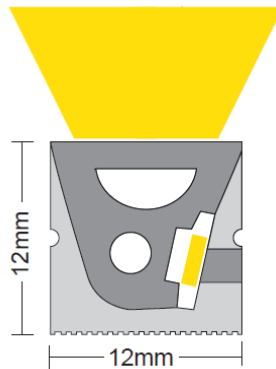

NEONFLEX NT1212

1000.-

DIA 12 mm. H 12 mm.



168led/m.



24V 10w/m. 500Lumen/m.

IP 67




2700K, 3000K, 4000K, 6000K

Top Bending

Stainless steel clip/ Flexible stainless steel clip

IP68 optional

Dimmable (0-10V/ Triac) Optional



LED STRIPLIGHT



TYPE-A

350.-

DIA 23.1 mm. H 8.5 mm. L 1000 mm.

- Recessed type
- Frosted PC cover

IP 20

- Accessories : End cap

TYPE-B

350.-

DIA 17.1 mm. H 8.5 mm. L 1000 mm.

- Recessed/ Surface type
- Frosted PC cover

IP 20

- Accessories : Mounting clip, End cap





TYPE-C

400.-

DIA 23.2 mm. H 15.3 mm. L 1000 mm.

-  Recessed type
-  Frosted PC cover



IP 20

-  Accessories : End cap

TYPE-D

400.-

DIA 17.1 mm. H 15.3 mm. L 1000 mm.

-  Recessed/ Surface type
-  Frosted PC cover

IP 20

-  Accessories : Mounting clip, End cap






TYPE-E

400.-

DIA 16 mm. H 16 mm. L 1000 mm.

 Surface type
 Frosted PC cover



IP 20

 Accessories : Mounting clip, End cap

TYPE-F

900.-

DIA 21.3 mm. H 26.1 mm. L 1000 mm.

 Floor recessed type
 Frosted PC cover

IP 20

 Accessories : End cap





TYPE-G1

1300.-

DIA 65 mm. H 35 mm. L 1000 mm.

- Recessed type
- Frosted PC cover

IP 20

- Accessories : Spring clip, End cap

TYPE-G2

1300.-

DIA 50 mm. H 35 mm. L 1000 mm.

- Surface/ Hanging type
- Frosted PC cover

IP 20

- Accessories : Mounting clip, End cap, Sling for hanging type






TYPE-H1

1050.-

DIA 50 mm. H 35 mm. L 1000 mm.

 Recessed type
 Frosted PC cover



IP 20

 Accessories : Spring clip, End cap


TYPE-H2

1050.-

DIA 35 mm. H 35 mm. L 1000 mm.

 Surface/ Hanging type
 Frosted PC cover

IP 20

 Accessories : Mounting clip, End cap,
Sling for hanging type






TYPE-J1

1650.-

DIA 90 mm. H 35 mm. L 1000 mm.

-  Recessed type
-  Frosted PC cover



IP 20

-  Accessories : Spring clip, End cap


TYPE-J2

1650.-

DIA 75 mm. H 35 mm. L 1000 mm.

-  Surface/ Hanging type
-  Frosted PC cover

IP 20

-  Accessories : Mounting clip, End cap
Sling for hanging type






TYPE-K1

800.-

DIA 35 mm. H 25 mm. L 1000 mm.

 Recessed type
 Frosted PC cover



IP 20

 Accessories : Spring clip, End cap

TYPE-K2

800.-

DIA 25 mm. H 25 mm. L 1000 mm.

 Recessed/ Surface type
 Frosted PC cover

IP 20

 Accessories : Mounting clip, End cap



ALU. PROFILE



TYPE-M

600.-

DIA 25.4 mm. H 28 mm. L 1000 mm.

 Surface type
 Frosted PC cover

IP 20

 Accessories : Mounting clip, End cap

TYPE-N

600.-

DIA 25.4 mm. H 28 mm. L 1000 mm.

 Surface type
 Frosted PC cover

IP 20

 Accessories : Mounting clip, End cap





TYPE-OA

3550.-

DIA 60 mm. H 90 mm. L 1000 mm.



Surface/ Hanging type
Frosted PC cover

IP 20

- Accessories : Mounting clip, End cap, Sling for hanging type

TYPE-OB

2950.-

DIA 68 mm. H 75 mm. L 1000 mm.




Recessed type
Frosted PC cover

IP 20

- Accessories : Spring clip, End cap



ALU. PROFILE

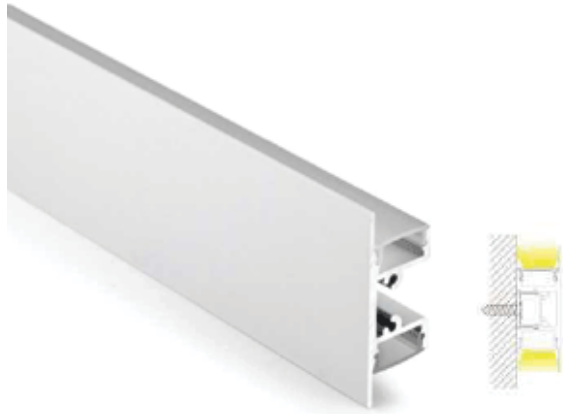

TYPE-Q

1200.-

DIA 48.5 mm. H 17.7 mm. L 1000 mm.



Wall surface type
Frosted PC cover
Up & Down light

IP 20



Accessories : End cap

TYPE-S

1000.-

DIA 43.5 mm. H 17.7 mm. L 1000 mm.



Wall surface type
Frosted PC cover
Up or Down light

IP 20



Accessories : End cap



ALU. PROFILE



TYPE-U1

350.-

DIA 12.8 mm. H 12 mm. L 1000 mm.



Recessed type

Frosted PC cover

Use with 5mm. led strip only

IP 20



Accessories : End cap

TYPE-U2

350.-

DIA 7.8 mm. H 12 mm. L 1000 mm.



Surface type

Frosted PC cover

Use with 5mm. led strip only

IP 20



Accessories : Mounting clip, End cap





TYPE-X

450.-

DIA 10 mm. H 10 mm. L 1000 mm.



Surface type
Frosted PC cover
Use with 5mm. led strip only

IP 20



Accessories : Mounting clip, End cap

TYPE-T

350.-

DIA 8 mm. H 8 mm. L 1000 mm.




Surface type
Frosted PC cover
Use with 5mm. led strip only

IP 20



Accessories : Mounting clip, End cap

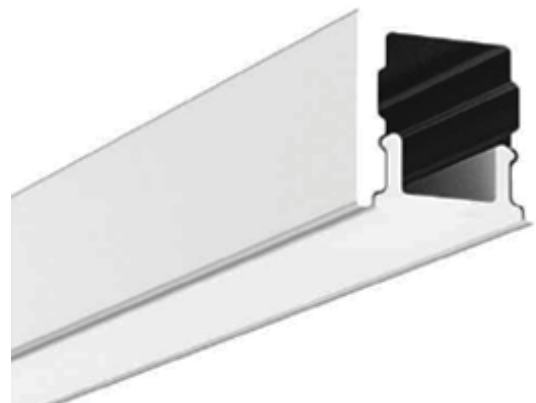

ALU. PROFILE



TYPE-R1

1750.-

DIA 65 mm. H 45 mm. L 1000 mm.

- Recessed type
- Frosted PC cover

IP 20

- Accessories : Spring clip, End cap

TYPE-R2

2450.-


DIA 50 mm. H 75 mm. L 1000 mm.

- Surface/ Hanging type
- Frosted PC cover

IP 20

- Accessories : Mounting clip, End cap



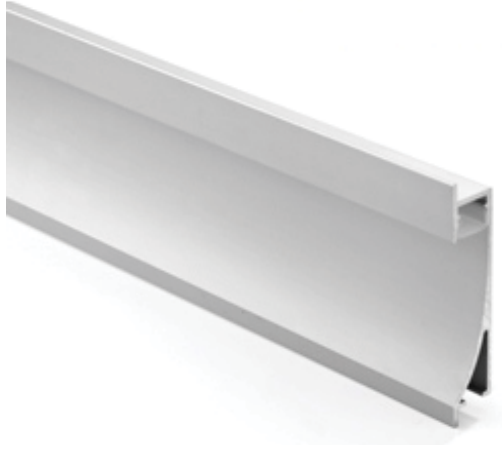

TYPE-W

1300.-

DIA 14 mm. H 68 mm. L 1000 mm.

- Wall recessed type
- Frosted PC cover

IP 20

- Accessories : End cap

TYPE-L

4000.-

DIA 60 mm. L 2000 mm.

- Surface/ Hanging type
- Frosted PC cover

IP 20

- Accessories : Mounting clip, End cap,
Sling for hanging type



ALU. PROFILE



TYPE-P

400.-

DIA 12 mm. H 20 mm. L 1000 mm.

 Surface type
 Frosted PC cover



IP 20

 Accessories : Mounting clip, End cap

TYPE-Z


2000.-

DIA 35.2 mm. H 66.8 mm. L 1000 mm.

 Surface/ Hanging type
 Frosted PC cover

IP 20

 Accessories : Mounting clip, End cap

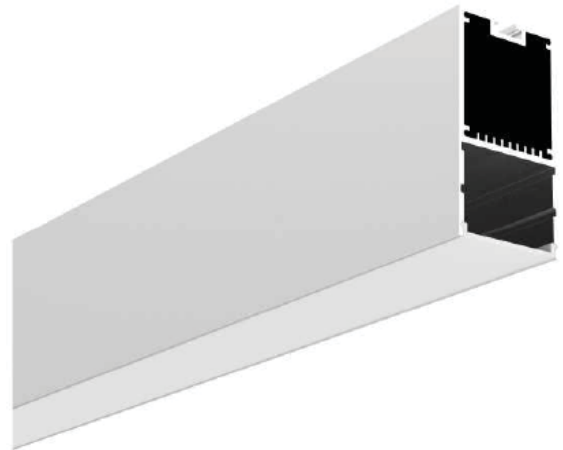



ALU. PROFILE




R6-1

1500.-

DIA 58.5×107 mm. D: 9 mm.

 Dimming remote control 1zone
 CR2032 Battery



 Use with V3-L, V4-L Controller




R8-1

1500.-

DIA 58.5×107 mm. D: 9 mm.

 RGB/ RGBW remote control 1zone
 CR2032 Battery

 Use with V3-L, V4-L Controller





CONTROLLER




R9

1500.-

DIA 58.5×107 mm. D: 9 mm.

 RGB/ RGBW remote control 1zone
 CR2032 Battery



 Use with V3-L, V4-L Controller




R7-1

1500.-

DIA 58.5×107 mm. D: 9 mm.

 CCT remote control 1zone
 CR2032 Battery

 Use with V3-L, V4-L Controller





CONTROLLER




RT-6

1800.-

DIA 53×122 mm. D: 17.5 mm.

 Dimming remote control 4zone
 CR2032 Battery



 Use with V3-L, V4-L Controller




RT9

1800.-

DIA 53×122 mm. D: 17.5 mm.

 RGB/ RGBW remote control 4zone
 CR2032 Battery



 Use with V3-L, V4-L Controller




RT7

1800.-

DIA 53×122 mm. D: 17.5 mm.

 CCT remote control 4zone
 CR2032 Battery

 Use with V3-L, V4-L Controller





T21-1

2500.-

DIA 53×122 mm. D: 17.5 mm.

- Dimming touch panel 4zone
- AAAx2 Battery

Use with V3-L, V4-L Controller



T24-1

2500.-

DIA 53×122 mm. D: 17.5 mm.

- RGB/ RGBW touch panel 4zone
- AAAx2 Battery

Use with V3-L, V4-L Controller



T22-1

2500.-

DIA 53×122 mm. D: 17.5 mm.

- CCT touch panel 4zone
- AAAx2 Battery

Use with V3-L, V4-L Controller



CONTROLLER



V3-L

1500.-

DIA 45x175 mm. H 27 mm.



RGB/CCT/Dimming controller

12-24Vdc

Max load 216W(12Vdc), 432W(24Vdc)



RF 2.4GHz

Use with R6-1, R8-1, R7-1, R9, RT6, RT7, RT9, T21-1, T22-1, T24-1



V4-L

1800.-

DIA 50x170 mm. H 23 mm.



RGBW/RGB/CCT/Dimming controller

12-24Vdc

Max load 240W(12Vdc), 480W(24Vdc)



RF 2.4GHz

Use with R6-1, R8-1, R7-1, R9, RT6, RT7, RT9, T21-1, T22-1, T24-1



CONTROLLER

EV3-X

1500.-

DIA 75x107 mm. H 24.5 mm.



RGB/CCT/Dimming signal repeater

12-24Vdc

Max load 360W(12Vdc), 720W(24Vdc)



3 channel, 10A per channel



EV4-X

1750.-

DIA 75x107 mm. H 24.5 mm.



RGBW/RGB/CCT/Dimming signal repeater

12-24Vdc

Max load 384W(12Vdc), 768W(24Vdc)



4 channel, 8A per channel



CONTROLLER

V1-T

2000.-



DIA 75x107 mm. H 24.5 mm.



Dimming controller

12-24Vdc

Max load 240W(12Vdc), 480W(24Vdc)



RF 2.4GHz use with R6-1, T21-1

0-10V Dimming controller/ Push-dim



V1-K

2000.-

DIA 75x107 mm. H 38 mm.



Dimming controller

12-24Vdc

Max load 240W(12Vdc), 480W(24Vdc)



RF 2.4GHz use with R6-1, T21-1

Dim switch built-in



CONTROLLER

Aluminium case IP20

12Vdc Switching power supply



12V 15W	Size : 85x58x33 mm.	450.-
12V 36W	Size : 85x58x33 mm.	750.-
12V 60W	Size : 139x55x28 mm.	1050.-
12V 100W	Size : 139x55x28 mm.	1250.-
12V 150W	Size : 178x61x28 mm.	1500.-
12V 200W	Size : 178x61x28 mm.	2000.-
12V 250W	Size : 160x98x30 mm.	2250.-
12V 360W	Size : 215x105x30 mm.	2500.-

Plastic case IP20

12Vdc Switching power supply

12V 15W	Size : 100x30x22 mm.	450.-
12V 36W	Size : 145x34x22 mm.	750.-
12V 60W	Size : 176x43x25 mm.	1050.-



Aluminium case IP67

12/24Vdc Switching power supply



12V/ 24V 200W Size : 237x60x33 mm. **2400.-**

12V/ 24V 250W Size : 240x72x33 mm. **3000.-**

12V/ 24V 300W Size : 240x72x33 mm. **3600.-**

Plastic case IP67

12/24Vdc Switching power supply

12V/ 24V 35W Size : 151x40x30 mm. **900.-**

12V/ 24V 60W Size : 165x42x32 mm. **1250.-**

12V/ 24V 150W Size : 192x52x37 mm. **1750.-**





Mean well LRS IP20

12/24Vdc Switching power supply

12V/ 24V 25W	Size : 78x51x28 mm.	700.-
12V/ 24V 35W	Size : 82x99x30 mm.	800.-
12V/ 24V 50W	Size : 139x55x28 mm.	850.-
12V/ 24V 75W	Size : 139x55x28 mm.	1040.-
12V/ 24V 100W	Size : 178x61x28 mm.	1160.-
12V/ 24V 150W	Size : 178x61x28 mm.	1360.-
12V/ 24V 200W	Size : 160x98x30 mm.	1680.-
12V/ 24V 360W	Size : 215x105x30 mm.	2100.-



Mean well LPV IP67

12/24Vdc Switching power supply

12V/ 24V 35W	Size : 148x40x30 mm.	1000.-
12V/ 24V 60W	Size : 162.5x42.5x32 mm.	1100.-
12V/ 24V 100W	Size : 190x52x37 mm.	1700.-
12V/ 24V 150W	Size : 191x63x37.5 mm.	2600.-



TRANSFORMER

CC LED DRIVER IP20

Constant current led driver

3-12Vdc 350mA Size : 42x40x21 mm. **400.-**

3-12Vdc 700mA Size : 42x40x21 mm. **400.-**



CC LED DRIVER IP65

Constant current led driver

2.5-4Vdc 700mA Size : 52.5×26.5×21mm. **500.-**





EUP75A-1W24V-1

DIA 54×213 mm. H 33 mm.



 Constant voltage dimmable driver
 24V 75W

 Use with 0-10V Dimming system



EUP150A-1W24V-1

DIA 74.8×206 mm. H 40.6 mm.

 Constant voltage dimmable driver
 24V 150W

 Use with 0-10V Dimming system



EUP200AD-1H24V-0

DIA 60×310 mm. H 45 mm.

 Constant voltage dimmable driver
 24V 200W


 Use with 0-10V Dimming system





EUP75T-1H24V-0

DIA 53.9×212.5 mm. H 36 mm.



 Constant voltage dimmable driver
 24V 75W


 Use with Triac/ Phase-cut Dimming system



EUP150T-1H24V-0

DIA 60×310 mm. H 45 mm.


 Constant voltage dimmable driver
 24V 150W

 Use with Triac/ Phase-cut Dimming system



EUP200T-1H24V-0

DIA 60×310 mm. H 45 mm.

 Constant voltage dimmable driver
 24V 200W

 Use with Triac/ Phase-cut Dimming system




LED DRIVER



EUP75D-1H24V-0

DIA 54×213 mm. H 33 mm.



 Constant voltage dimmable driver
 24V 75W

 Use with DALI Dimming system



EUP150D-1W24V-0

DIA 74.8×206 mm. H 40.6 mm.

 Constant voltage dimmable driver
 24V 150W

 Use with DALI Dimming system



EUP200AD-1W24V-0

DIA 60×310 mm. H 45 mm.

 Constant voltage dimmable driver
 24V 200W

 Use with DALI Dimming system





EUP10A-1HMC-1-120

DIA 110*30*22 mm.

- Constant current dimmable driver
- 9-42Vdc Max. 10W
- 120-350mA

- Use with 0-10V Dimming system



EUP10A-1HMC-1-350

DIA 110*30*22 mm.

- Constant current dimmable driver
- 2-21Vdc Max. 10W
- 350-700mA

- Use with 0-10V Dimming system



EUP15A-1HMC-1

DIA 150*43*22 mm.

- Constant current dimmable driver
- 9-42Vdc Max. 15W
- 280-450mA


- Use with 0-10V Dimming system





EUP20A-1HMC-1

DIA 150*43*22 mm.


 Constant current dimmable driver
9-40Vdc Max. 20W
350-700mA

 Use with 0-10V Dimming system



EUP30A-1HMC-1

DIA 150*43*22 mm.


 Constant current dimmable driver
9-45Vdc Max. 30W
550-900mA

 Use with 0-10V Dimming system



EUP40A-1HMC-1

DIA 137*81.5*31 mm.

 Constant current dimmable driver
9-45Vdc Max. 40W
850-1200mA

 Use with 0-10V Dimming system



EUP10T-1HMC-1-120

DIA 110*30*22 mm.



- Constant current dimmable driver
- 9-42Vdc Max. 10W
- 120-350mA

- Use with Triac/ Phase-cut Dimming system



EUP10T-1HMC-1-350

DIA 110*30*22 mm.

- Constant current dimmable driver
- 2-21Vdc Max. 10W
- 350-700mA

- Use with Triac/ Phase-cut Dimming system



EUP15T-1HMC-0

DIA 150*43*22 mm.

- Constant current dimmable driver
- 9-42Vdc Max. 15W
- 280-450mA

- Use with Triac/ Phase-cut Dimming system





EUP20T-1HMC-0

DIA 150*43*22 mm.

- Constant current dimmable driver
- 9-40Vdc Max. 20W
- 350-700mA

Use with Triac/ Phase-cut Dimming system



EUP30T-1HMC-0

DIA 185*43*29 mm.

- Constant current dimmable driver
- 9-45Vdc Max. 30W
- 600-900mA

Use with Triac/ Phase-cut Dimming system



EUP45T-1HMC-0

DIA 137*82*31 mm.

- Constant current dimmable driver
- 33-65Vdc Max. 45W
- 500-1050mA



Use with Triac/ Phase-cut Dimming system



EUP10D-1HMC-0-120

DIA 110*30*22 mm.





-  Constant current dimmable driver
-  9-45Vdc Max. 10W
- 120-300mA

-  Use with DALI Dimming system



EUP10D-1HMC-0-350

DIA 110*30*22 mm.

-  Constant current dimmable driver
-  2-21Vdc Max. 10W
- 350-700mA



-  Use with DALI Dimming system



EUP12D-1HMC-0

DIA 150*43*22 mm.



-  Constant current dimmable driver
-  9-40Vdc Max. 12W
- 200-350mA

-  Use with DALI Dimming system





EUP20D-1HMC-0

DIA 150*43*22 mm.

- Constant current dimmable driver
- 9-40Vdc Max. 20W
- 350-700mA

- Use with DALI Dimming system



EUP30D-1HMC-0

DIA 150*43*29 mm.

- Constant current dimmable driver
- 9-45Vdc Max. 30W
- 550-900mA

- Use with DALI Dimming system



EUP40D-1HMC-0

DIA 137*82*31 mm.

- Constant current dimmable driver
- 9-45Vdc Max. 40W
- 850-1200mA



- Use with DALI Dimming system






OSRAM Driver LVED PRO 30

DIA 87x35x24mm.



 Constant current driver
 25-42Vdc Max. 30W
450-700mA


 Non-dim Driver
0.95 PF
THD 15%



OSRAM Driver LVED PRO 40

DIA 146x40x27mm.

 Constant current driver
 25-42Vdc Max. 40W
700-950mA



 Non-dim Driver
0.95 PF
THD 15%




LED DRIVER

OSRAM Driver LVED PRO 12

DIA 97x40x27mm.



 Constant current driver
 25-42Vdc Max. 12W
120-300mA


 Non-dim Driver
0.95 PF
THD 15%



OSRAM Driver LVED PRO 20

DIA 87x35x24mm.

 Constant current driver
 25-42Vdc Max. 20W
250-500mA

 Non-dim Driver
0.95 PF
THD 15%



LED DRIVER