

The image features a 5x4 grid of squares. The top row consists of four squares with a light blue-to-white gradient. The second row consists of four squares with a light blue-to-white gradient. The third row consists of four squares with a medium blue-to-white gradient. The fourth row consists of four squares with a medium blue-to-white gradient. The bottom row consists of four squares with a dark blue-to-white gradient. The text 'UNDERWATER LIGHT' is positioned in the bottom right corner of the grid, in a white, bold, italicized sans-serif font.


***UNDERWATER  
LIGHT***

## **RUW-3WW**

**3150.-**

DIA 50 mm. H 56 mm.



 24Vdc 3W 264lm  
 24° 3000K



**IP 68**

- Stainless stell SUS316  
Tempered glass cover  
Use with 24Vdc switching power supply  
Wire 1m.  
Box size Dia 62mm. H 95mm.

## **RUW-10WW**

**4950.-**

DIA 95 mm. H 80 mm.

 24Vdc 10W 912lm  
 23° 3000K

**IP 68**

- Stainless stell SUS316  
Tempered glass cover  
Use with 24Vdc switching power supply  
Wire 1m.  
Box size Dia 84mm. H 113mm.



UNDERWATER



## **RUW-6WW**

**4500.-**

DIA 120 mm. H 64 mm.

 24Vdc 6W 528lm  
 30° 3000K



**IP 68**

- Stainless steel SUS316  
Tempered glass cover  
Use with 24Vdc switching power supply  
Wire 1m.  
Box size Dia 125mm. H 113mm.

## **RUW-9RGB**

**6000.-**

DIA 120 mm. H 64 mm.

 24Vdc 3x3W 266lm  
 40° RGB Color change

**IP 68**

- Stainless steel SUS316  
Tempered glass cover  
Use with 24Vdc switching power supply  
Use with RGB controller  
Wire 1m.  
Box size Dia 125mm. H 113mm.



UNDERWATER



## **RUW-14WW**

**7000.-**

DIA 150 mm. H 113 mm.



24Vdc 7x2W 812lm

30° 3000K

**IP 68**

- Stainless steel SUS316  
Tempered glass cover  
Use with 24Vdc switching power supply  
Wire 1.5m.  
Box size Dia 150mm. H 113mm.

## **RUW-24WW**

**9500.-**

DIA 180 mm. H 113 mm.



24Vdc 12x2W 1410lm

30° 3000K

**IP 68**

- Stainless steel SUS316  
Tempered glass cover  
Use with 24Vdc switching power supply  
Wire 1.5m.  
Box size Dia 180mm. H 113mm.





**UNDERWATER**



## SUW-3WW

3500.-

DIA 49.5 mm. H 50 mm.

 24Vdc 3W 264lm  
 40° 3000K



**IP 68**

- Stainless steel SUS316  
Tempered glass cover  
Use with 24Vdc switching power supply  
Wire 1.5m.

## SUW-7WW

4350.-

DIA 80 mm. H 97 mm.


 24Vdc 7W 616lm  
 23° 3000K

**IP 68**

- Stainless steel SUS316  
Tempered glass cover  
Use with 24Vdc switching power supply  
Wire 1.5m.




UNDERWATER

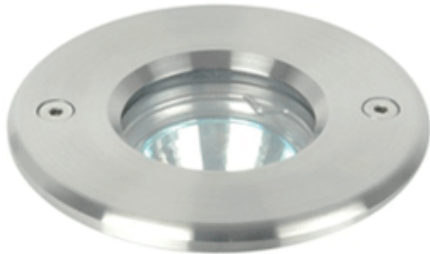


## SUW015

4200.-

DIA 101 mm. H 123 mm.

 LED MR16x1  
Use 12V only


**IP 68**

-  Stainless steel SUS316  
Tempered glass cover  
Use with 12Vdc switching power supply  
Wire 3m.


## SUB015

4050.-

DIA 75 mm. H 74 mm.

 LED MR16x1  
Use 12V only

**IP 68**

-  Stainless steel SUS316  
Tempered glass cover  
Use with 12Vdc switching power supply  
Wire 3m.



UNDERWATER